

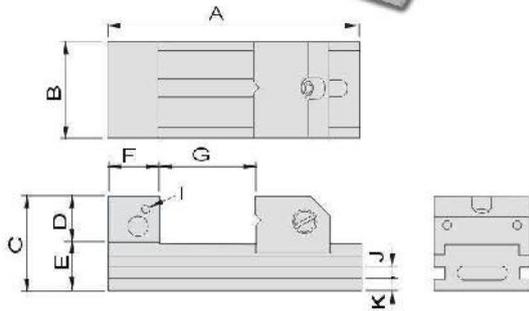
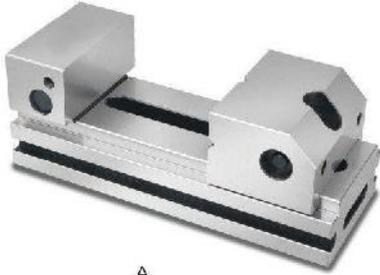
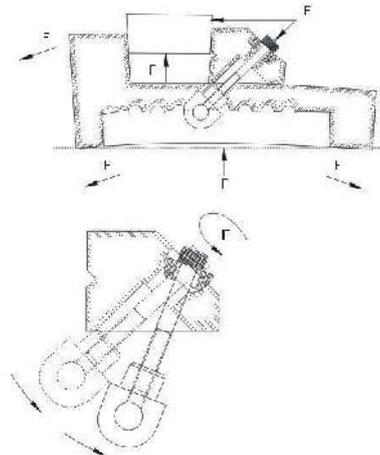
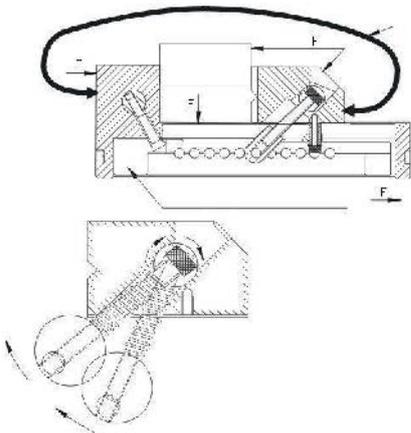


52800

VV







		A	B	C	D	E	F	G	I	J	K	
52800-20	VV20	150	48	53	25	28	25	0-70	M5	6	8.5	1.7kg
52800-30	VV30	190	73	70	35	35	38	0-100	M6	8	9.5	4.5kg
52800-40	VV40	230	98	80	40	40	46	0-125	M6	10	10	8.4kg
52800-50	VV50	300	125	98	48	50	60	0-160	M8	12	13	17.4kg
52800-60	VV60	350	150	100	50	50	60	0-210	M8	12	13	22.7kg



52800



VV

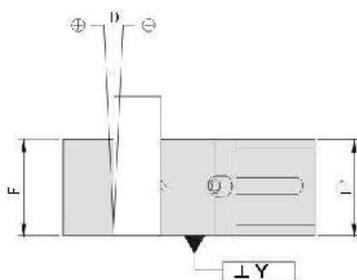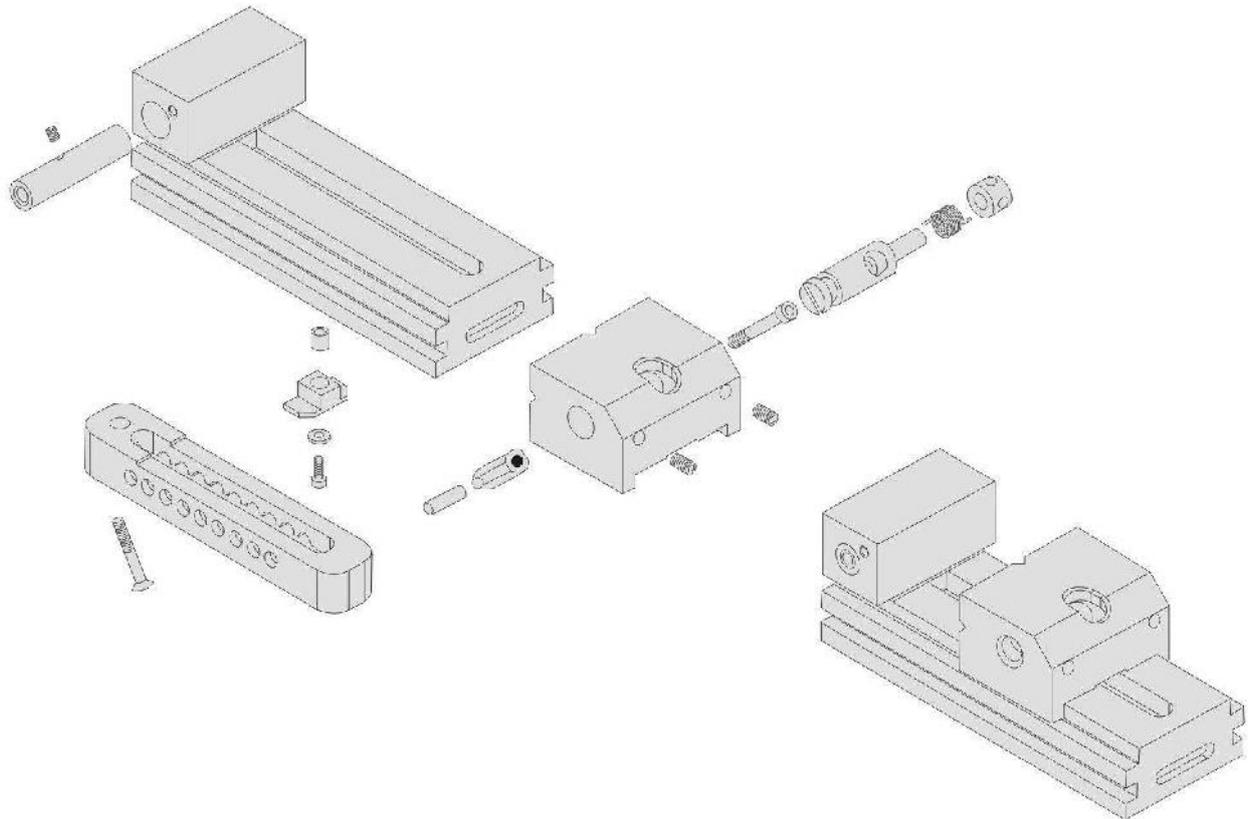


Position	Description	Tolérance
A	Perpendicularité en X	± 4
B	Perpendicularité en X	± 4
C	Perpendicularité en X	± 4
D	Perpendicularité en Y	± 4
E	Perpendicularité en X	± 3
F	Perpendicularité en Y	± 3

52820

HU

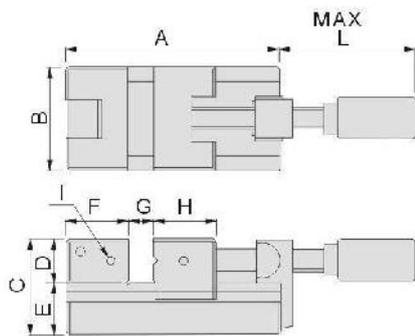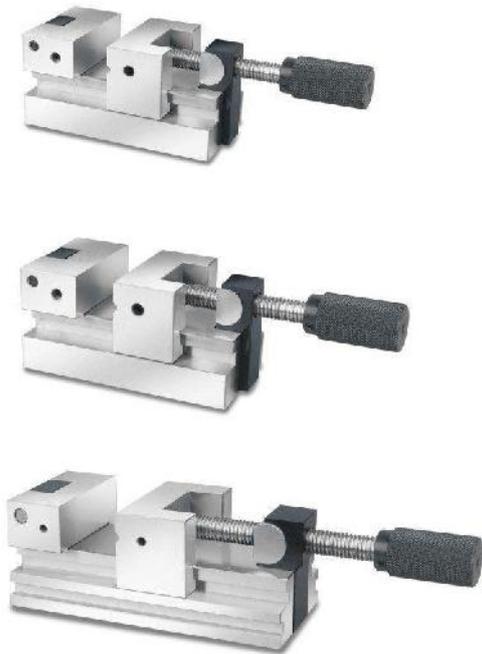





HU60/70

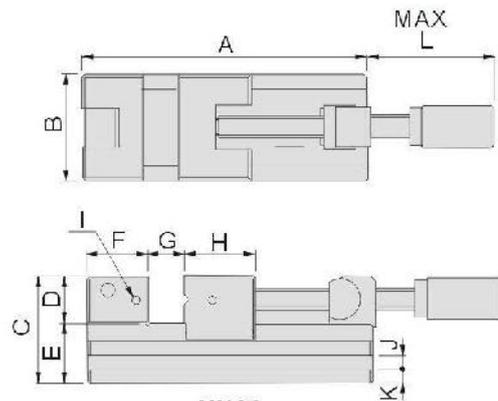

HU90

		A	B	C	D	E	F	G	H	I	L	
52820-60	HU60	122	60	60	25	35	35	0~47	40	M6	105	2.5kg
52820-70	HU70	172	70	70	30	40	40	0~80	45	M6	149.5	4.7kg

		A	B	C	D	E	F	G	H	I	J(WxD)	K	L
52820-90	HU90	237	90	90	40	50	50	0~125	50	M6	10x7	10	201

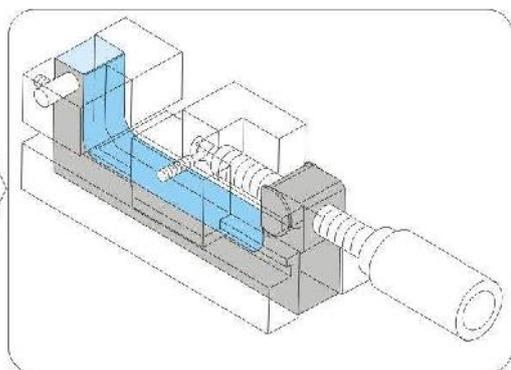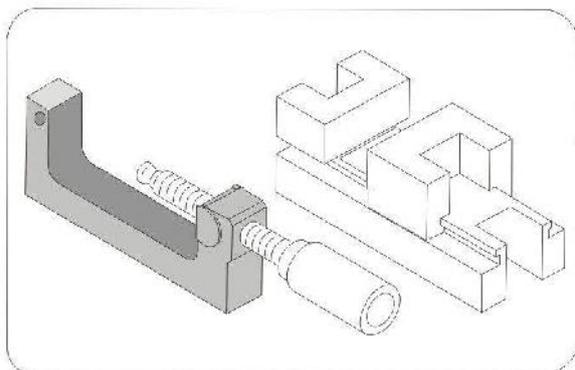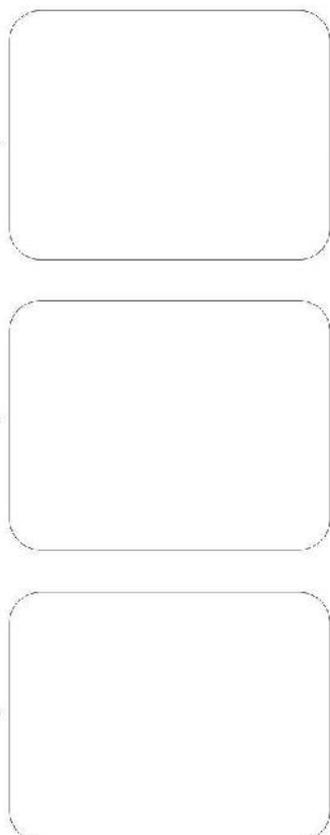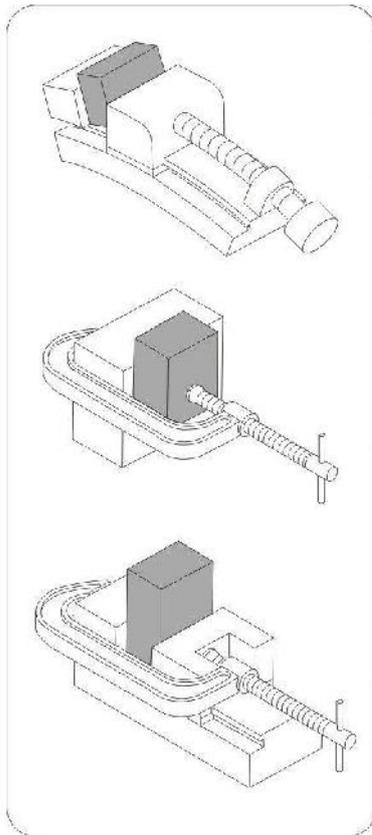

52830

SV


SV34



SV70



SV90

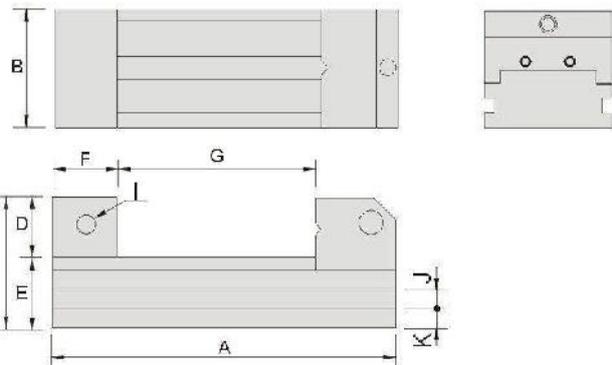


		A	B	C	D	E	F	G	I	J	K	
52830-34	SV34	75	34	35	15	20	20	0-25	M4	-	-	0.5kg
52830-45	SV45	110	45	45	20	25	25	0-50	M5	6	8	1.0kg
52830-70	SV70	160	70	62	30	32	33	0-80	M6	8	9	3.0kg
52830-90	SV90	210	90	80	40	40	40	0-115	M6	10	12	6.7kg
52830-120	SV120	286	120	90	40	50	60	0-150	M6	12	14	14.9kg

52840

A

A20

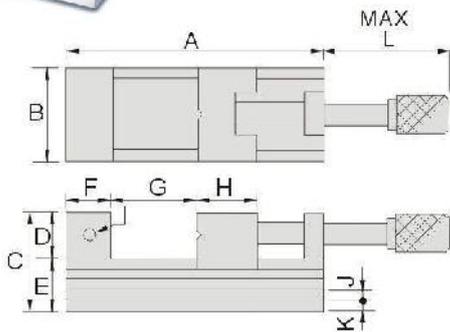

		A	B	C	D	E	F	G	H	I	J	K	L	
52840-20	A20	140	48	55	25	30	25	0-75	40	M6	-	-	117	2.3kg
52840-25	A25	160	63	69	30	39	30	0-85	45	M6	8	9	129	3.8kg
52840-30	A30	180	73	78	35	43	35	0-95	50	M6	8	10	132	6.0kg
52840-40	A40	230	98	92	45	47	45	0-120	50	M8	10	11	172	11.3kg


52850

AS

AS60



AS70

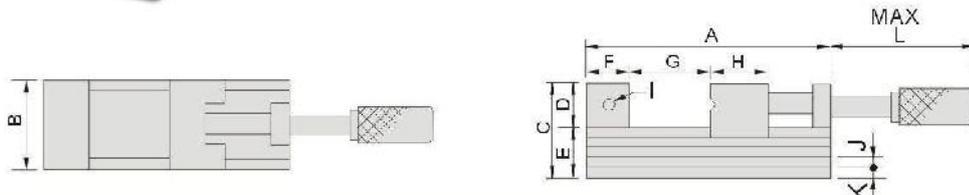

		A	B	C	D	E	F	G	H	I	J	K	L	
52850-60	AS60	92	60	50	25	25	25	0-32	30	M5	6	4.5	60	1.6kg
52850-70	AS70	165	70	62	30	32	33	0-80	45	M6	7	8	140	4.0kg
52850-90	AS90	212	90	80	40	40	40	0-120	50	M6	9	9	192	8.4kg

52860


V100



Spec		V100
A		160
B		73
C		93
D		30
E		63
F		33
G		80
H		45
I		M5
J		100
Angle Max.		46°
		5.6kg

52870


VC100

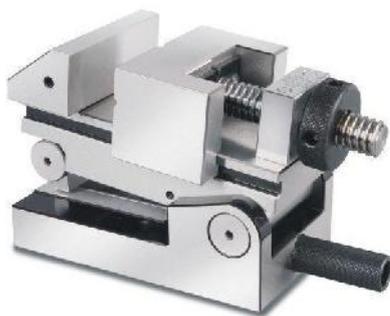

Spec		VC100
A		130
B		73
C		93
D		30
E		63
F		33
G		45
H		45
I		M5
J		100
Angle Max.		46°
		4.6kg

52880

L50

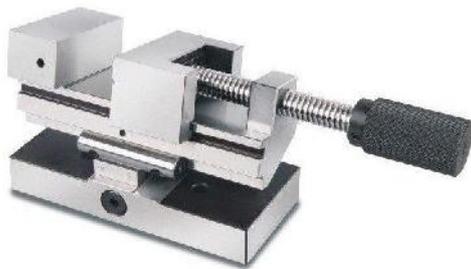

Spec		L50
A		160
B		73
C		93
D		30
E		63
F		33
G		80
H		45
I		M5
Max. Angle		46°
		5.8kg


52890

CSV100





Spec		CSV100
A		160
B		73
C		124
D		30
E		94
F		33
G		80
H		45
I		M5
J		100
Max. Angle		46°
		7.5kg

52900 VSB

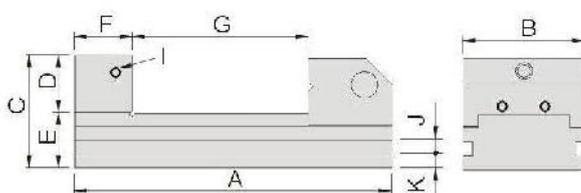

Réf	Modèle	A	B	C	D	E	F	G	I	J	K	Poids
52900-15	VSB15	105	36	48	20	28	25	0-40	M6	7	9	0.8kg
52900-20	VSB20	150	48	53	25	28	25	0-75	M6	6	8.5	1.5kg
52900-25	VSB25	176	63	59	30	29	30	0-95	M6	8	7.5	2.6kg
52900-30	VSB30	190	73	68	35	33	35	0-105	M6	8	9	4.0kg
52900-40	VSB40	245	98	90	45	45	45	0-135	M6	10	14	9.5kg


52910 VS

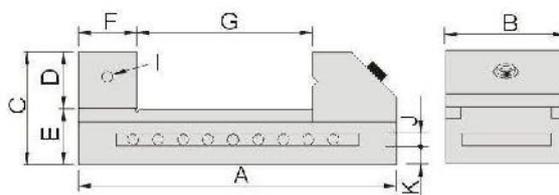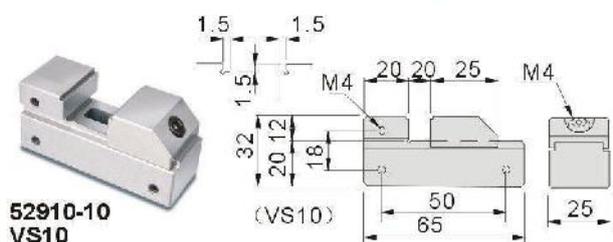

Réf	Modèle	A	B	C	D	E	F	G	I	J	K	Poids
52910-15	VS15	105	36	48	20	28	25	0-40	M6	7	9	0.9kg
52910-20	VS20	150	50	53	25	28	30	0-80	M6	8	8	1.6kg
52910-25	VS25	175	63	63	32	31	35	0-90	M6	10	11	2.9kg
52910-30	VS30	190	73	70	35	35	35	0-100	M6	10	12	4.3kg
52910-35	VS35	235	88	80	40	40	40	0-130	M8	12	14	6.8kg
52910-40	VS40	245	100	90	45	45	45	0-130	M8	12	16	10kg
52910-50	VS50	285	125	100	50	50	45	0-160	M8	14	18	15kg

52920


VS

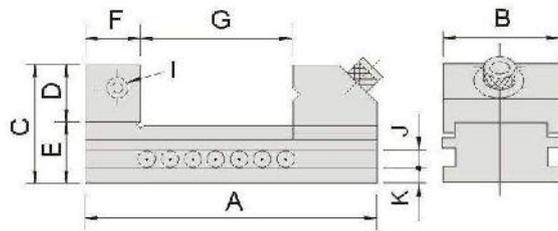

		A	B	C	D	E	F	G	I	J	K	
52920-60	VS60	330	150	100	50	50	50	0-180	M8	14	18	20kg


52930

VB

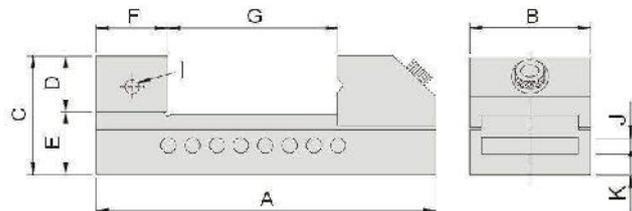


		A	B	C	D	E	F	G	I	J	K	
52930-15	VB15	100	36	48	20	28	25	0-40	M5	8	8	1.0kg
52930-20	VB20	150	50	53	25	28	30	0-80	M6	8	8	1.7kg
52930-25	VB25	175	63	63	32	31	35	0-90	M6	10	11	3.0kg
52930-30	VB30	190	73	70	35	35	35	0-100	M6	10	12	4.2kg
52930-35	VB35	235	88	80	40	40	40	0-130	M8	12	14	7.0kg
52930-40	VB40	245	100	90	45	45	45	0-130	M8	12	16	9.0kg
52930-50	VB50	285	125	100	50	50	45	0-160	M8	14	18	15.0kg

52940 SVA

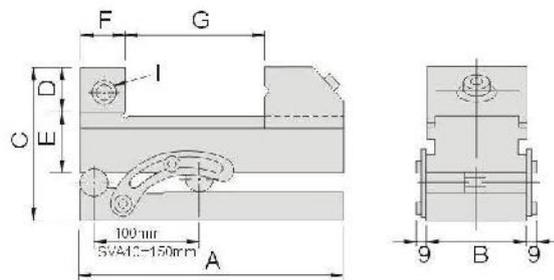

		A	B	C	D	E	F	G	I	
52940-20	SVA20	150	48	88.5	25	28	25	0-75	M6	2.9kg
52940-25	SVA25	176	63	94.5	30	29	30	0-85	M6	4.6kg
52940-30	SVA30	190	73	103.5	35	33	35	0-95	M6	6.4kg
52940-40	SVA40	245	98	126.5	45	45	45	0-125	M6	14.1kg




52950 SV

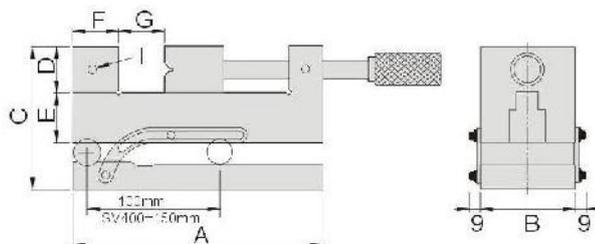

		A	B	C	D	E	F	G	I	
52950-200	SV200	156	48	87.5	25	27	25	0-63	M6	3.7kg
52950-250	SV250	176	63	98.5	30	33	30	0-73	M6	6.0kg
52950-300	SV300	190	73	103.5	35	33	35	0-76	M6	8.0kg
52950-400	SV400	255	98	120.5	40	42	40	0-120	M8	16.0kg

52960




VSD

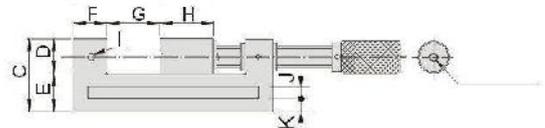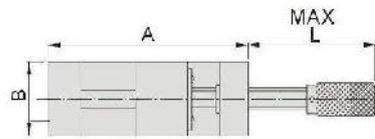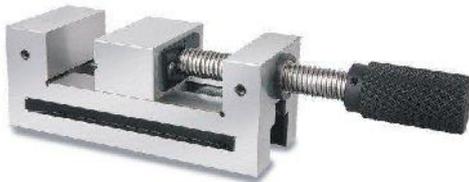

		A	B	C	D	E	F	G	H	I	J	K	L	
52960-20	VSD20	156	48	52	25	27	25	0-63	34	M6	8	9.5	125	2.3kg
52960-25	VSD25	176	63	63	30	33	30	0-73	40	M6	10	11.5	147	4.0kg
52960-30	VSD30	190	73	73	35	38	35	0-76	45	M6	10	14	151	5.5kg
52960-40	VSD40	255	98	82	40	42	40	0-120	50	M8	12	15	196	11.0kg
52960-50	VSD50	310	125	100	50	50	50	0-152	57	M8	14	18	231	18.3kg
52960-60	VSD60	325	150	100	50	50	50	0-165	60	M8	14	18	245	20.0kg

52970


PGV

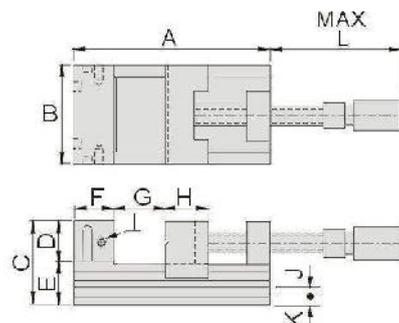

		A	B	C	D	E	F	G	H	I	J (WXD)	K	L	
52970-100	PGV100	220	100	80	40	40	40	110	50	M10	9x7	9.5	235	11.1kg
52970-125	PGV125	300	125	90	40	50	60	165	70	M10	11x7	12.5	290	20.6kg
52970-150	PGV150	340	150	95	45	50	60	210	70	M10	12x11	14	340	23.5kg

53342



VLS



		A	B	C	D	E	G	
53342-01	VLS15	100	35	40	20	25	0~45	1.0kg
53342-02	VLS20	140	48	50	25	25	0~75	2.0kg
53342-03	VLS25	172	63	60	30	30	0~90	3.3kg
53342-04	VLS30	190	73	70	35	35	0~100	4.3kg
53342-05	VLS40	230	98	80	40	40	0~125	9.8kg

53346

VHS

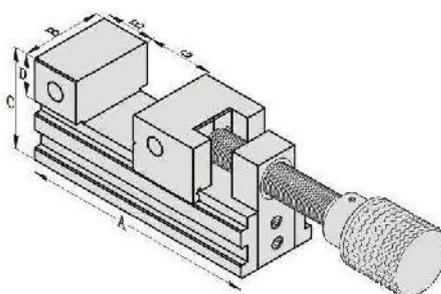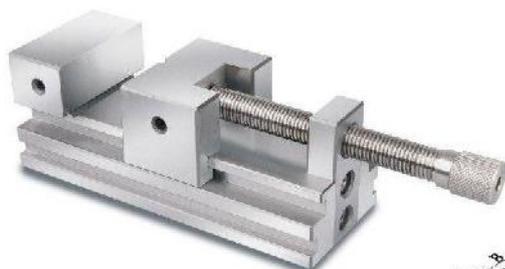

		A	B	C	D	E	G	
53346-01	VHS20	140	48	55	25	25	0~70	2.60kg
53346-02	VHS25	172	63	69	30	30	0~85	4.80kg
53346-03	VHS30	190	73	78	35	35	0~100	6.60kg
53346-04	VHS40	230	98	92	40	40	0~125	13.0kg